HUMIDIFIED BAIN MARIE

HOME FOOD REPLACEMENTS

CURVED GLASS SLIDING SYSTEM

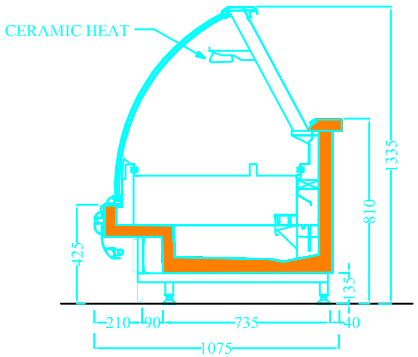

MODEL C

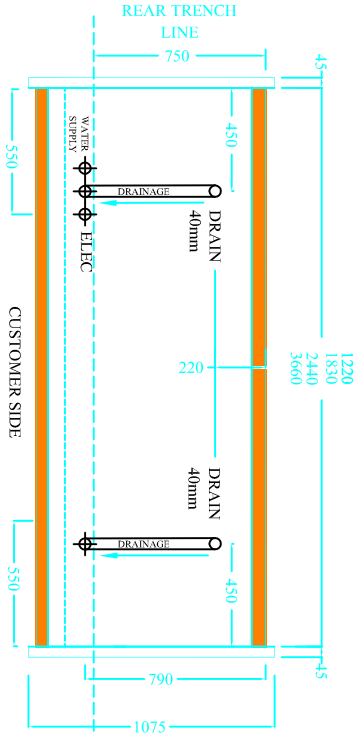

SPECIFICATION

CABINET	DISPLAY	MODEL C	MODEL B	GN1/1 PANS	TEMPERATURE	ELECTRICAL REQUIREMENTS			
LENGTH	SURFACE	1300 HIGH	1230 HIGH	QUANTITY	RANGE	WATTS	AMPS	VOLTS	REQ.CIRCUIT
1220mm	1.00 m^2	4BM-C	4BM-B	3 FULL / 3 THIRDS	60 TO 65° c	2990	13.5	220	20 A
1830mm	1.45 m^2	6BM-C	6BM-B	5 FULL / 5 THIRDS	60 TO 65° c	4620	21 - 3ph	380	10 A
2440mm	2.00 m^2	8BM-C	8BM-B	7 FULL / 7 THIRDS	60 TO 65° c	5760	26 - 3ph	380	15 A
3660mm	2.90 m^2	12BM-C	12BM-B	10 FULL / 10 THIRDS	60 TO 65° c	8590	39 - 3ph	380	20 A

* ADD 45mm FOR EACH PATCH END

NOTE :

1. FLOOR DRAINAGE AND 15mm WATER SUPPLY REQUIRED
2. HUMIDIFIED CABINETS ARE DESIGNED TO MAINTAIN THE TEMP.OF HOT FOODS
3. HUMIDIFIED CABINETS ARE NOT DESIGNED TO HEAT OR COOK PRODUCTS
4. DO NOT DISPLAY MORE FOOD THAN WILL BE SOLD WITHIN A 2 HOUR PERIOD
5. GASTRONORM FULL , HALF AND THIRD PANS 65mm DEEP SUPPLIED IN DISPLAY AREA

WE RESERVE THE RIGHT TO CONTINUALLY IMPROVE OUR PRODUCT , SPECIFICATIONS AND DESIGN . WE ARE ALSO NOT LIABLE TO UPGRADE PREVIOUSLY SOLD EQUIPMENT TO NEW SPECIFICATIONS .

CONCORD
REFRIGERATION (PTY) LTD

PHONE : (031) 4622323 FAX : (031) 4622383
E-MAIL ADDRESS : sales@concordrefrigeration.co.za
WEBSITE : www.concordrefrigeration.co.za