


BIN FREEZER

SELF SERVICE



SPECIFICATION

CABINET LENGTH	DISPLAY SURFACE	MODEL	DISCHARGE TEMP	REF CAP WATTS	EVAP TEMP	OFF CYCLE DEFROST	ELECTRIC DEFROST	ELECTRICAL REQUIREMENTS			
2440mm	1.71 m ²	BF 8	-24° c	1750	-30° c	30 MIN	2600 WATTS	3594	16.3 - 3ph	380	10A
3660mm	2.56 m ²	BF 12	-24° c	2300	-30° c	30 MIN	3000 WATTS	4593	20.9 - 3ph	380	10A




THE ABOVE SPECIFICATION IS BASED ON STANDARD CONDITIONS OF 60% RH AND 25 DEGREES C STORE TEMP.

FEATURES

- * ONE PIECE FOAM INJECTED SHELL FOR THERMAL EFFICIENCY, ACCURACY AND STRUCTURAL STRENGTH
- * COLOUR INSERTS TO BUMPER RAIL
- * HEAVY DUTY ADJUSTABLE FEET FOR LEVELLING AND PERFECT DRAINAGE
- * PRE-WIRED ELECTRICAL PANEL
- * CLIP ON FAN PLENUMS ALLOWS ACCESS TO LARGE DRAIN POINTS FOR EASE OF SANITATION AND CLEANING
- * THERMOMETER TO MONITOR TEMPERATURE
- * ELECTRIC HEATER WITH SAFETY CUTOFF

OPTIONAL EXTRAS

- * DUMMY COUNTERS, CORNERS OR WEDGES
- * SCALE STANDS, PACKET HOLDERS
- * CONGEALED FLOOR LIGHTING UNDER CABINETS
- * INTEGRATED CONTROL PANEL WITH DIGITAL ELECTRONIC CONTROL OF TEMPERATURE, DEFROST, FANS AND LIGHTS INCLUDING CIRCUIT BREAKERS, SOLENOID VALVE AND SWITCHGEAR

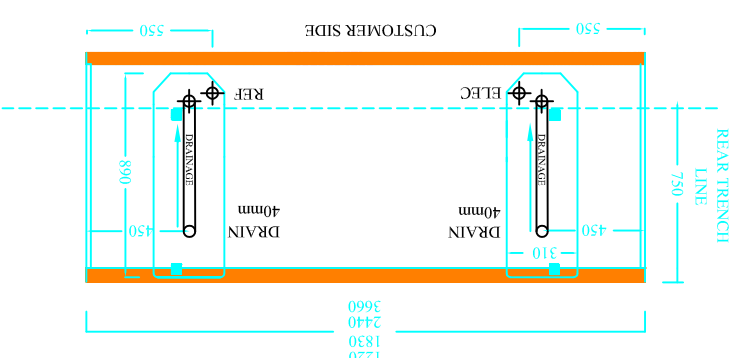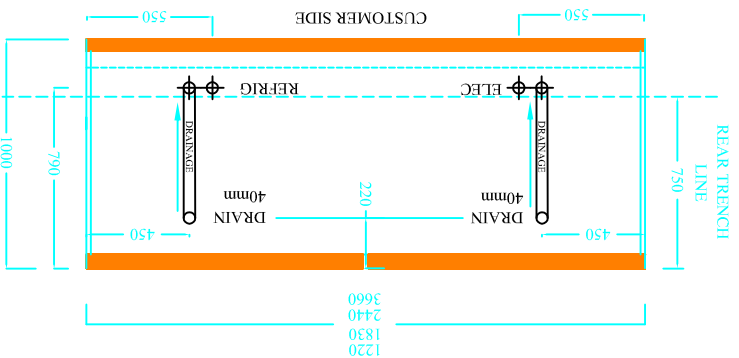

REFRIGERATION (PTY) LTD

WE RESERVE THE RIGHT TO CONTINUALLY IMPROVE OUR PRODUCT, SPECIFICATIONS AND DESIGN. WE ARE ALSO NOT LIABLE TO UPGRADE PREVIOUSLY SOLD EQUIPMENT TO NEW SPECIFICATIONS.

PHONE : (031) 4622323 FAX : (031) 4622383
 E-MAIL ADDRESS : sales@concordrefrigeration.co.za
 WEBSITE : www.concordrefrigeration.co.za