DAIRY / PROCESSED MEATS

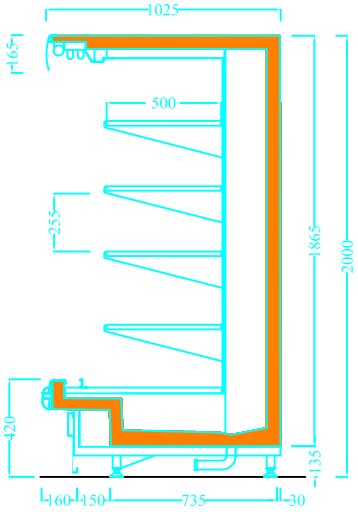

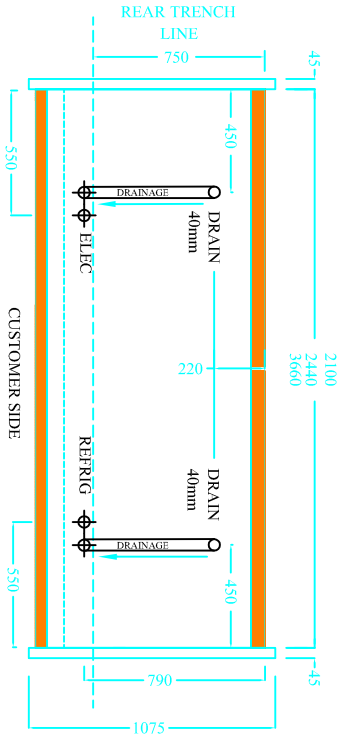

SPECIFICATION

CABINET LENGTH	DISPLAY SURFACE	MODEL HD	TEMPERATURE RANGE	REF CAP WATTS	EVAP TEMP	OFF CYCLE DEFROST	ELECTRICAL REQUIREMENTS
2100mm	5.46 m^2	HD7	+3°c TO +5°c	2920	- 6° c	25 MIN	708 WATTS
2440mm	6.34 m^2	HD8	+3°c TO +5°c	3350	- 6° c	25 MIN	750 WATTS
3660mm	9.52 m^2	HD12	+3°c TO +5°c	5000	- 6° c	25 MIN	1131 WATTS

* ADD 45mm FOR EACH PATCH END

THE ABOVE SPECIFICATION IS BASED ON STANDARD CONDITIONS OF 25ºC - 60% RH

OPTIONAL

SHELF LIGHTING	ELECTRIC DEFROST
880 WATTS	900 WATTS
880 WATTS	1000 WATTS
1320 WATTS	1500 WATTS

ADD TO ELECTRICAL REQUIREMENTS

WE RESERVE THE RIGHT TO CONTINUALLY IMPROVE OUR PRODUCT , SPECIFICATIONS AND DESIGN . WE ARE ALSO NOT LIABLE TO UPGRADE PREVIOUSLY SOLD EQUIPMENT TO NEW SPECIFICATIONS .

CONCORD
REFRIGERATION (PTY) LTD

PHONE : (031) 4622323 FAX : (031) 4622383
E-MAIL ADDRESS : sales@concordrefrigeration.co.za
WEBSITE : www.concordrefrigeration.co.za