
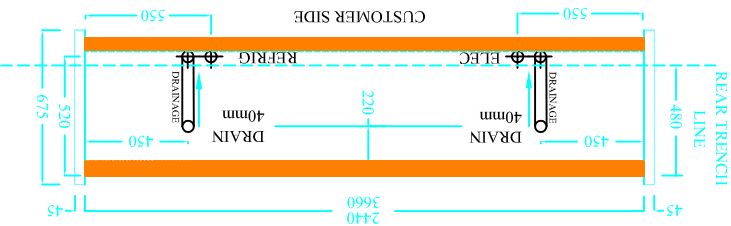


DAIRY LIVEWALL

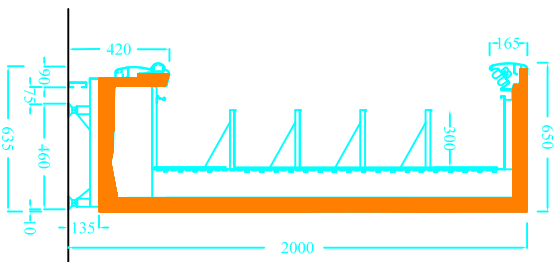

SPECIFICATION

CABINET	DISPLAY	MODEL	TEMPERATURE RANGE	REF CAP WATTS	EVAP TEMP	OFF CYCLE	ELECTRICAL REQUIREMENTS
2440mm	3.59 m ²	DLW 8	+3°c TO +5°c	3100	-6°c	25 MIN	750 WATTS
3660mm	5.38 m ²	DLW 12	+3°c TO +5°c	4600	-6°c	25 MIN	1131 WATTS

* ADD 45mm FOR EACH PATCH END

THE ABOVE SPECIFICATION IS BASED ON STANDARD CONDITIONS OF 25°c - 60% RH

OPTIONAL

SHELF LIGHTING	ELECTRIC DEROST
880 WATTS	1000 WATTS
1320 WATTS	1500 WATTS

ADD TO ELECTRICAL REQUIREMENTS

WE RESERVE THE RIGHT TO CONTINUALLY IMPROVE OUR PRODUCT . SPECIFICATIONS AND DESIGN . WE ARE ALSO NOT LIABLE TO UPGRADE PREVIOUSLY SOLD EQUIPMENT TO NEW SPECIFICATIONS.



REFRIGERATION (PTY) LTD

PHONE : (031) 4622323 FAX : (031) 4622383
 E-MAIL ADDRESS : sales@concordrefrigeration.co.za
 WEBSITE : www.concordrefrigeration.co.za