
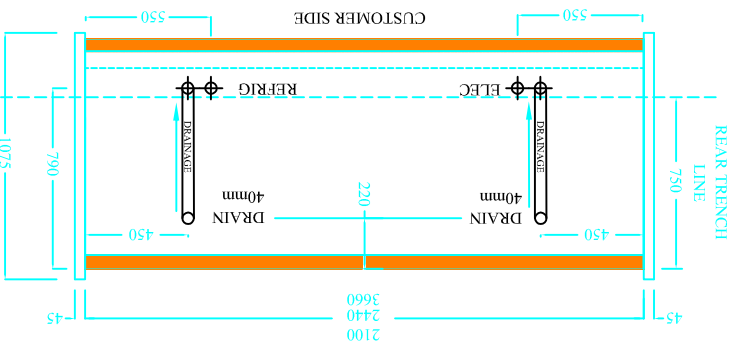


FRUIT & VEG/ PRE-PACK

4 OR 5 TIER SHELVING

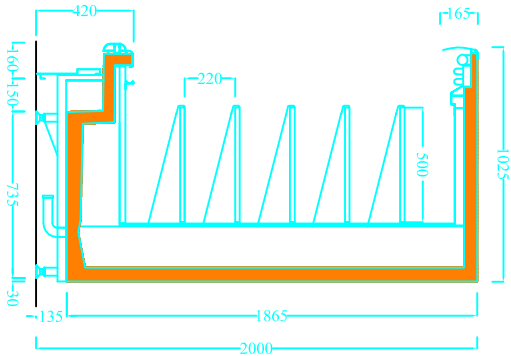

SPECIFICATION

CABINET LENGTH	DISPLAY SURFACE	MODEL	TEMPERATURE RANGE	REF CAP WATTS	EVAP TEMP	OFF CYCLE DEFROST	ELECTRICAL REQUIREMENTS
2100mm	5.46 m ²	HP	+3°c TO +5°c	2665	-4° c	20 MIN	708W/ATTS
2440mm	6.34 m ²	HP7	+3°c TO +5°c	3100	-4° c	20 MIN	750W/ATTS
3660mm	9.52 m ²	HP12	+3°c TO +5°c	4600	-4° c	20 MIN	1131W/ATTS

* ADD 45mm FOR EACH PATCH END THE ABOVE SPECIFICATION IS BASED ON STANDARD CONDITIONS OF 25°c - 60% RH

OPTIONAL

SHELF LIGHTING	ELECTRIC DEFROST
880W/ATTS	900W/ATTS
880W/ATTS	1000W/ATTS
1320W/ATTS	1500W/ATTS

ADD TO ELECTRICAL REQUIREMENTS



REFRIGERATION (PTY) LTD

WE RESERVE THE RIGHT TO CONTINUALLY IMPROVE OUR PRODUCT .SPECIFICATIONS AND DESIGN . WE ARE ALSO NOT LIABLE TO UPGRADE PREVIOUSLY SOLD EQUIPMENT TO NEW SPECIFICATIONS.

PHONE : (031) 4622323 FAX : (031) 4622383
 E-MAIL ADDRESS : sales@concordrefrigeration.co.za
 WEBSITE : www.concordrefrigeration.co.za