GOURMET MEAT

CURVED GLASS SLIDING SYSTEM

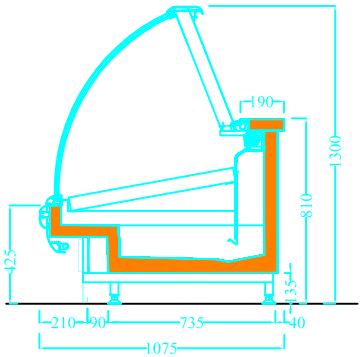

MODEL C

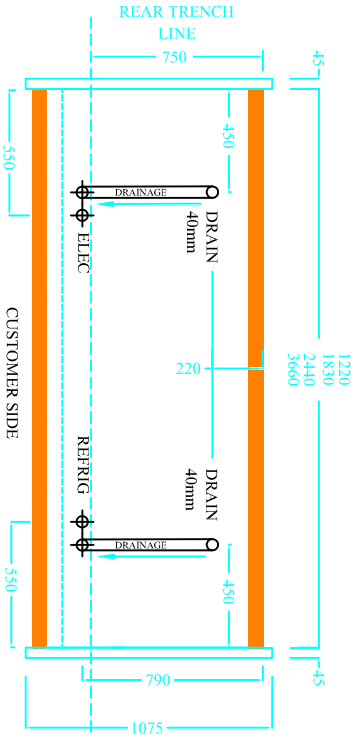

SPECIFICATION

CABINET LENGTH	DISPLAY SURFACE	MODEL-C 1300 High	MODEL-B 1230 High	TEMPERATURE RANGE	REF CAP WATTS	EVAP TEMP	OFF CYCLE DEFROST	ELECTRICAL REQUIREMENTS
1220mm	0.85 m^2	4GM-C	4GM-B	0°c TO +2°c	450	- 8° c	30 MIN	420 WATTS
1830mm	1.28 m^2	6GM-C	6GM-B	0°c TO +2°c	675	- 8° c	30 MIN	722 WATTS
2440mm	1.70 m^2	8GM-C	8GM-B	0°c TO +2°c	900	- 8° c	30 MIN	862 WATTS
3660mm	2.56 m^2	12GM-C	12GM-B	0°c TO +2°c	1350	- 8° c	30 MIN	1390 WATTS

* ADD 45mm FOR EACH PATCH END

THE ABOVE SPECIFICATION IS BASED ON STANDARD CONDITIONS OF 25ºC - 60% RH

OPTIONAL

ELECTRIC DEFROST
600 WATTS
800 WATTS
1000 WATTS
1500 WATTS

ADD TO ELECTRICAL REQUIREMENTS

WE RESERVE THE RIGHT TO CONTINUALLY IMPROVE OUR PRODUCT , SPECIFICATIONS AND DESIGN . WE ARE ALSO NOT LIABLE TO UPGRADE PREVIOUSLY SOLD EQUIPMENT TO NEW SPECIFICATIONS .

CONCORD
REFRIGERATION (PTY) LTD

PHONE : (031) 4622323 FAX : (031) 4622383
E-MAIL ADDRESS : sales@concordrefrigeration.co.za
WEBSITE : www.concordrefrigeration.co.za