

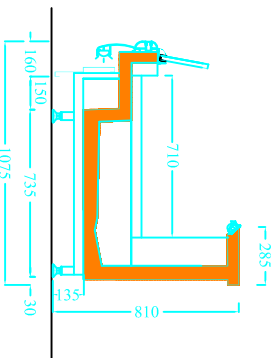


SELF SERVICE CHILLER

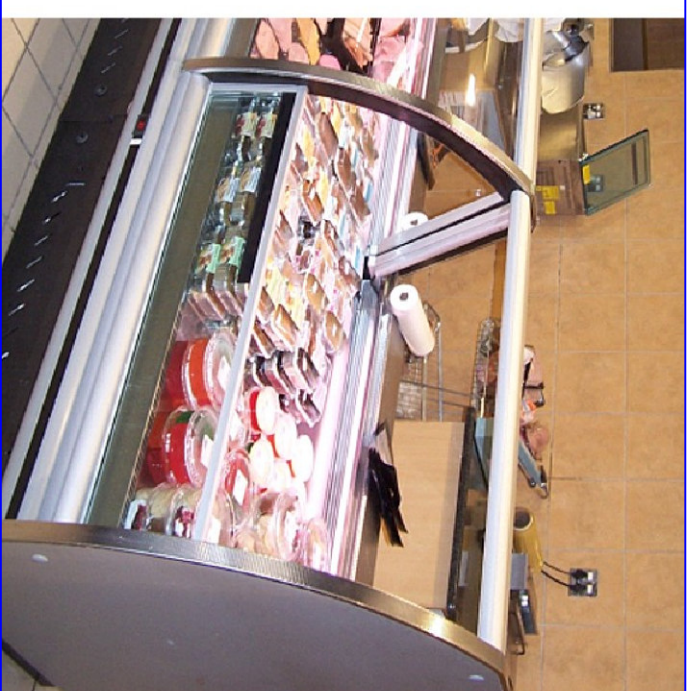

MODEL C

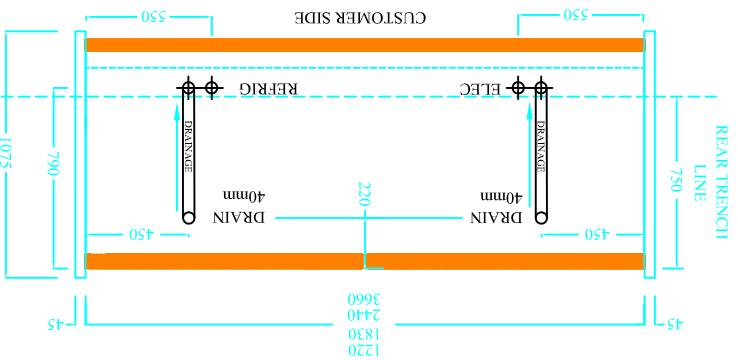

SPECIFICATION

CABINET LENGTH	DISPLAY SURFACE	MODEL-C	MODEL-B	TEMPERATURE RANGE	REF CAP WATTS	EVAP TEMP	OFF CYCLE	ELECTRICAL REQUIREMENTS
1220mm	0,85 m ²	1300 High	1230 High	0°c TO +2°c	675	-8°c	30 MIN	420 WATTS
1830mm	1,28 m ²	6LM-C	6LM-B	0°c TO +2°c	1040	-8°c	30 MIN	722 WATTS
2440mm	1,70 m ²	8LM-C	8LM-B	0°c TO +2°c	1390	-8°c	30 MIN	862 WATTS
3660mm	2,56 m ²	12LM-C	12LM-B	0°c TO +2°c	2080	-8°c	30 MIN	1390 WATTS

* ADD 45mm FOR EACH PATCH END THE ABOVE SPECIFICATION IS BASED ON STANDARD CONDITIONS OF 25°c - 60% RH

OPTIONAL

ELECTRIC DEFROST	ADD TO ELECTRICAL REQUIREMENTS
600 WATTS	
800 WATTS	
1000 WATTS	
1500 WATTS	



REFRIGERATION (PTY) LTD

WE RESERVE THE RIGHT TO CONTINUALLY IMPROVE OUR PRODUCT . SPECIFICATIONS AND DESIGN . WE ARE ALSO NOT LIABLE TO UPGRADE PREVIOUSLY SOLD EQUIPMENT TO NEW SPECIFICATIONS.

PHONE : (031) 4622323 FAX : (031) 4622383
 E-MAIL ADDRESS : sales@concordrefrigeration.co.za
 WEBSITE : www.concordrefrigeration.co.za