LOW MULTI- DECK CHILLER

MODEL : LHS 3

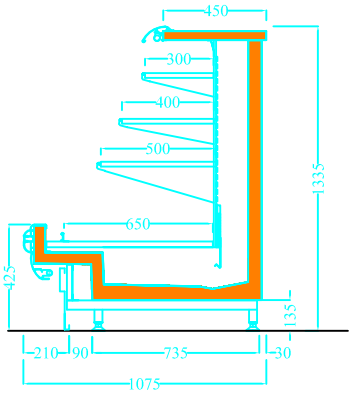

MODEL C

MODEL : LHS 2



MODEL B

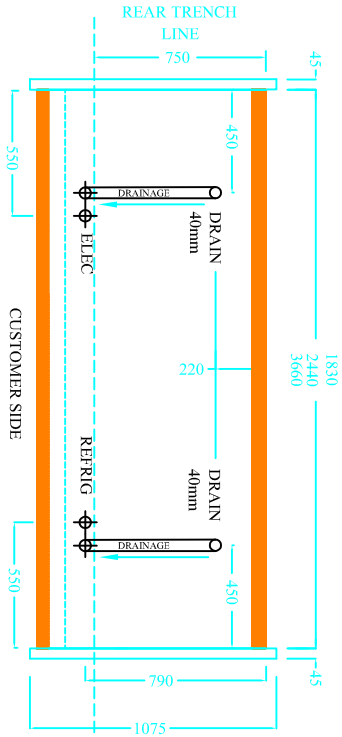

HMR / DAIRY / BAKERY SPECIFICATION

CABINET LENGTH	DISPLAY SURFACE	MODEL-C 1300 High	MODEL-B 1230 High	TEMPERATURE RANGE	REF CAP WATTS	EVAP TEMP	OFF CYCLE DEFROST	ELECTRICAL REQUIREMENTS
1830mm	3.37 m^2	LMD 6-C	LMD 6-B	+3°c TO +5°c	2920	- 6° c	25 MIN	880 WATTS
2440mm	4.49 m^2	LMD 8-C	LMD 8-B	+3°c TO +5°c	3350	- 6° c	25 MIN	880 WATTS
3660mm	6.73 m^2	LMD 12-C	LMD 12-B	+3°c TO +5°c	5000	- 6° c	25 MIN	1320 WATTS

* ADD 45mm FOR EACH PATCH END

OPTIONAL

ELECTRIC DEFROST REQUIREMENTS
900 WATTS
1000 WATTS
1500 WATTS

FRESH MEAT/CHICKEN SPECIFICATION

CABINET LENGTH	DISPLAY SURFACE	MODEL-C 1300 High	MODEL-B 1230 High	TEMPERATURE RANGE	REF CAP WATTS	EVAP TEMP	OFF CYCLE DEFROST	ELECTRICAL REQUIREMENTS
1830mm	3.37 m^2	LMD 6-C	LMD 6-B	0°c TO +2°c	3212	- 9° c	25 MIN	880 WATTS
2440mm	4.49 m^2	LMD 8-C	LMD 8-B	0°c TO +2°c	3880	- 9° c	25 MIN	880 WATTS
3660mm	6.73 m^2	LMD 12-C	LMD 12-B	0°c TO +2°c	5820	- 9° c	25 MIN	1320 WATTS

* ADD 45mm FOR EACH PATCH END

THE ABOVE SPECIFICATION IS BASED ON STANDARD CONDITIONS OF 25°C - 60% RH

OPTIONAL

ELECTRIC DEFROST REQUIREMENTS
900 WATTS
1000 WATTS
1500 WATTS

ADD TO ELECTRICAL REQUIREMENTS

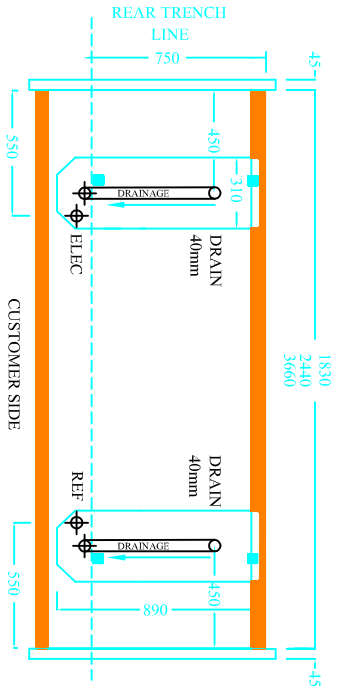

WE RESERVE THE RIGHT TO CONTINUALLY IMPROVE OUR PRODUCT , SPECIFICATIONS AND DESIGN . WE ARE ALSO NOT LIABLE TO UPGRADE PREVIOUSLY SOLD EQUIPMENT TO NEW SPECIFICATIONS .

CONCORD
REFRIGERATION (PTY) LTD

PHONE : (031) 4622323 FAX : (031) 4622383
E-MAIL ADDRESS : sales@concordrefrigeration.co.za
WEBSITE : www.concordrefrigeration.co.za